

A Powerful Solution for PC-Based Spirometry

The Micro Direct SpiroUSB combines our gold standard digital volume transducer with our user-friendly, multi-window Spirometry PC Software to create a powerful solution for PC-based spirometry.

The Spirometry PC Software is an easy-to-use spirometry data collection and database system that offers powerful comparative and long term trending facilities including the overlaying of previous test curves for instant comparison.

Requiring two USB ports, the SpiroUSB is ideal for use on any Windows based laptop or desktop computer. Simply install the Spirometry PC software, plug in the dongle and SpiroUSB sensor and you are ready to go. The ease of use means reduced training times and faster patient turnaround. The child incentive display and ATS quality checks ensure maximal results every time.

MD Spiro

803 Webster Street Lewiston, ME 04240 Telephone 800-588-3381 Fax 207-786-7280 www.mdspiro.com

SpiroUSB



Features

- USB plug and play device Microsoft Windows certified up to Windows 8
- Designed for ease of use with single click operation of all main functions
- Patient and spirometry data storage with powerful search facilities
- Full ATS test quality checks
- Real-time Flow/Volume and Volume/Time traces
- Choice of child incentive animated display
- Choice of predicted normal values
- Estimated lung age and interpretation of spirometry test
- Pre and post bronchodilator comparison
- Long term trend of lung function parameters
- Overlay feature for visual comparison of tests
- Can be used on multiple PC's with dongle software protection key

PC Requirements

- Microsoft Windows XP 32-Bit, Vista 32 & 64 Bit, Windows 7 32 & 64 Bit and Windows 8 32 & 64 Bit
- Processor: 800 MHz or above
- RAM: 256 MB
- 50 MB of free hard disk space
- Video: SVGA 1024x768, 256 color
- Two free USB ports (for dongle protection key and device)
- Internet Explorer 4.01 or higher

Technical Specifications:

тм

Product: Micro Direct SpiroUSB [™]	Catalo
Parameters Measured : VC, EVC, IVC, FEV0.75, FEV1, FEV3, FEV6, FVC,	ML2525
PEF, FEV0.75/VC, FEV0.75/FVC, FEV1/VC, FEV1% (FEV1/FVC), FEV3/VC, FEV3/FVC, FEV0.75/FEV6, FEV1/FEV6, MEF75, MEF50,	3385
MEF25, MMEF (FEF25-75), MEF50/VC, MEF50/FVC, MVV, FIV1, FIVC, PIF, FIV1%, MIF25, MIF50, MIF75, R50, MET, FET, TV, ERV,	3395
IRV, IC, FRC, RV, TLC, FRC/TLC, RV/TLC and lung age. (Expiratory measurements with baseline, post bronchodilator 1 and 2, % predicted,	3397
% change and normal range).	3314SB
Predicted Normals: NHANES III, Crapo, Polgar, Hsu, Wang and many more	3314B5
Suggested Interpretation: User Selectable	
Flow Technology: Bi-directional digital volume	PSA110
transducer	3301
Resolution: 10 mL volume; 0.03 l/s flow	
Data Storage: Actual requirements will vary depending on the amount of data to be stored.	3304
Up to 2 GB per database	3325
Accuracy when in Operating Range:	46-70

+/- 3% to ATS recommendations - Standardization of spirometry 1994 update for flows and volumes

Ordering Info:


Catalog #:

ML2525	SpiroUSB Spirometer
3385	SpiroSafe Filters (Bag of 100)
3395	MicroCheck Mouthpieces Cardboard (Box of 200)
3397	MicroCheck Mouthpieces Plastic (Box of 200)
3314SB	Mouthpieces Cardboard (Box of 200)
3314B5	Mouthpieces Cardboard (Box of 500)
PSA1100	Pediatric Adapter
3301	Pediatric Mouthpieces Cardboard (Bag of 100)
3304	Nose Clips (Bag of 20)
3325	3L Calibration Syringe
46-70	Protex Disinfectant Wipe (Canister of 120 wipes)

1. Plug into your computer to instantly launch Spirometry PC Software.

F1	🚮 Start Screen 👒	
5	<u>Start a ne</u> w exami	
F2 Starts a new examination		

2. Click the "New Exam" button in Spirometry PC Software

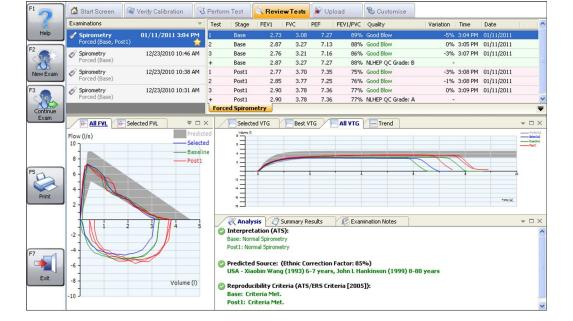



3. Blow into the SpiroUSBTM and view result

Easy as 1 - 2 - 3